


CAT 325 with dozerblade 1085 hours CE EPA made Japan

- Amount of previous owners
- Attachments
- Brand
- Bucket capacity cm3
- Certificates
- Condition
- Condition info/guarantee
- Country
- Delivery terms
- Dipper / stick length cm
- Emission level
- Engine
- Engine manufacturer
- Engine output hp
- Full service history
- General grade [1 min - 5 max]
- Gross Weight kg
- Inspection report
- Internal stock no.

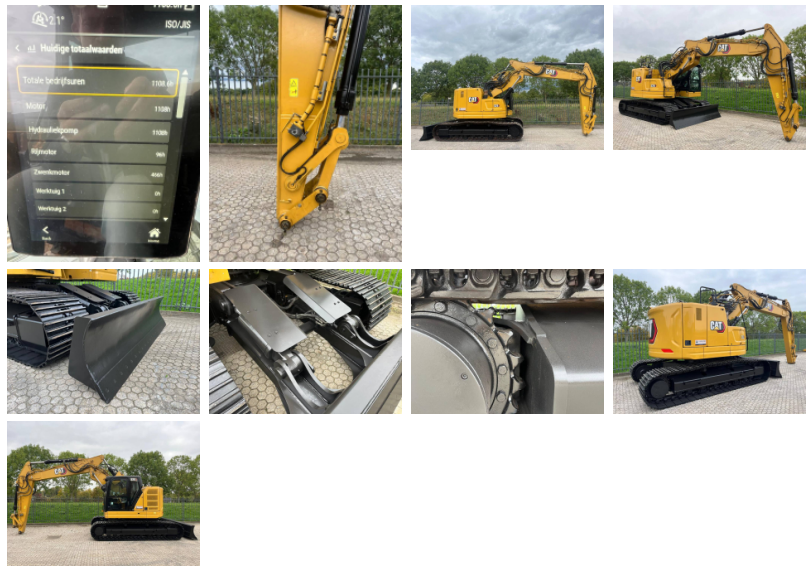

Latest inspection

Machine location

Manufacturing / Serial
number



Model

Model description

Original colour

Other information

Riverland Equipment BV offers you from stock : One x [1] Caterpillar 325 full option excavator 1100 hours only year 2023 VA boom and stick Zero tail swing Dozer blade hammer lines rotating lines quick coupler lines Erops cabin with airconditioning and climate control undercarriage with 650 mm trackshoes airsuspended driverseat seat heating climate control radio player with Bluetooth electric refuel pump rear view and dead spot camera safety valves automatic central greasing sun screen and sun roof Cat Grade control reversible fan original color engine type Cat 4.4 engine power 185 HP working weight 27.700 kg factory CE certified factory EPA certified Made in Japan last service at 995 hours Price ex works Haaften, The Netherlands each euro 215.000 Engine Model Cat® C4.4 Net Power ISO 9249 128.5 kW 172 hp ISO 9249 (DIN) 175 hp [metric] Engine Power

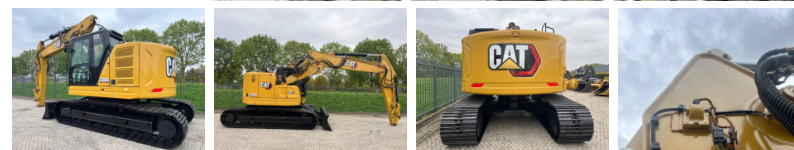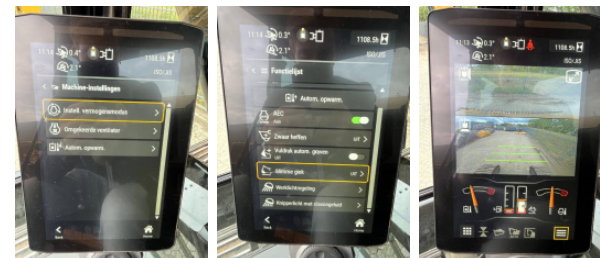

ISO 14396 129.4 kW 174 hp ISO 14396
[DIN] 176 hp [metric] Bore 105 mm 4 in
Stroke 127 mm 5 in Displacement 4.4 L
269 in³ Biodiesel capability Up to B20(1) •
Meets U.S. EPA Tier 4 Final, EU Stage V, and
Japan 2014 emission standards. •
Recommended for use up to 4500 m
[14,760 ft] altitude with engine power
derate above 3000 m [9,840 ft]. •
Advertised power is tested per the specified
standard in effect at the time of
manufacture. • Net power advertised is the
power available at the flywheel when the
engine is equipped with fan, air intake
system, exhaust system and alternator. •
Engine speed at 2,200 rpm. (1)Cat diesel
engines are required to use ULSD (ultra-low
sulfur diesel fuel with 15 ppm of sulfur or
less) or ULSD blended with the following
lower-carbon intensity fuels* * up to: □ 20%
biodiesel FAME (fatty acid methyl ester)* □
100% renewable diesel, HVO (hydrotreated
vegetable oil) and GTL (gas-to-liquid) fuels
Refer to guidelines for successful
application. Please consult your Cat dealer
or “Caterpillar Machine Fluids
Recommendations” (SEBU6250) for details.
*Engines with no aftertreatment devices
can use higher blends, up to 100% biodiesel



RIVERLAND
EQUIPMENT BV

RIVERLAND EQUIPMENT BV

Hertog Karelweg 21
NL 4175 LS Haaften
The Netherlands

T: +31 418 654000

F: +31 418 651623

E: info@riverlandequipment.com

E: sales@riverlandequipment.com

(for use of blends higher than 20% biodiesel,
consult your Cat dealer). * *Tailpipe
greenhouse gas emissions from
lower-carbon intensity fuels

Output of the auxiliary hydraulics	l/min
Power type	
Product link	
Production country	
Registration number	
Top speed	km/h
Track width	cm
Transport dimensions (LxWxH)	m
Undercarriage	
Year of manufacture	